


Auxiliary generator
IMO Tier II / IMO Tier III
High speed

6D16-MPT

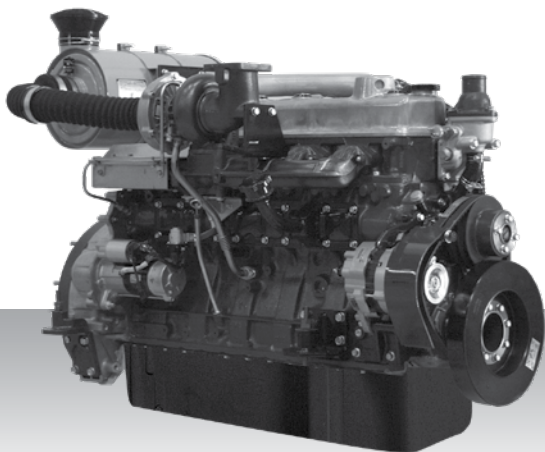

6-cylinder, 4-stroke, water-cooled diesel engine,
with direct-injection and turbocharger.

Bore x stroke (mm) : 118 x 115

Displacement (l) : 7.54

Rating

kW	bhp	rpm	Hz	Emission	SCR system IMO Tier III*
106	142	1500	50	not regulated under IMO Tier III	n.a.
122	164	1800	60	not regulated under IMO Tier III	n.a.

*For more information on our SCR systems, please see chapter SCR system specifications or visit our website engine-genset.mhi.com

Engine dimensions & dry weight

L (mm) : 1335

W (mm) : 731

H (mm) : 830

Dry weight (kg) : 575

Dimensions and weight are based on standard configuration.