


Auxiliary generator  
IMO Tier II / IMO Tier III  
High speed

# 6D24-MPTA

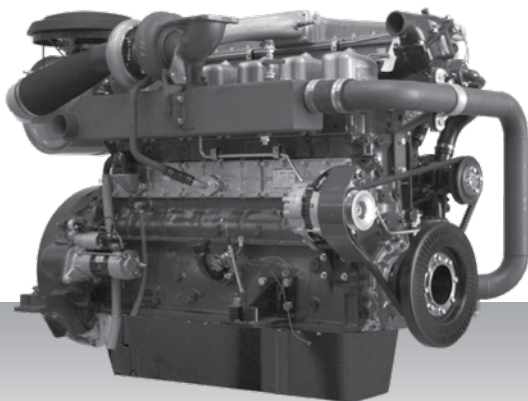

6-cylinder, 4-stroke, water cooled diesel engine,  
with direct-injection, turbocharger and air-cooler.

Bore x stroke (mm) : 130 x 150

Displacement (l) : 11.95

## Rating

kW	bhp	rpm	Hz	Emission	SCR system IMO Tier III*
181	243	1500	50	IMO Tier II	n.a.
218	292	1800	60	IMO Tier II	n.a.

\*For more information on our SCR systems, please see chapter SCR system specifications or visit our website [engine-genset.mhi.com](http://engine-genset.mhi.com)

## Engine dimensions & dry weight

L (mm) : 1535

W (mm) : 880

H (mm) : 1235

Dry weight (kg) : 575

Dimensions and weight are based on standard configuration.