


Auxiliary generator
IMO Tier II - Medium speed

S16U-MPTK

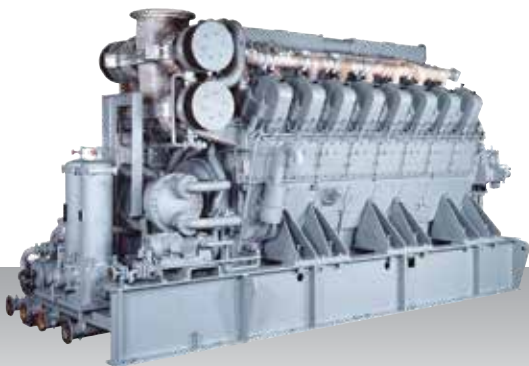

16-cylinder, 4-stroke, water-cooled diesel engine,
with direct-injection, turbocharger and air-cooler.

Bore x stroke (mm) : 240 x 260

Displacement (l) : 188.19

Rating

kW	bhp	rpm	Hz	Emission
3065	4110	900	60	IMO Tier II
3388	4543	1000	50	IMO Tier II
3580	4801	1200	60	IMO Tier II

Engine dimensions & dry weight

L (mm) : 4628

W (mm) : 1710

H (mm) : 2473

Dry weight (kg) : 20500

Dimensions and weight are based on standard configuration.